

A11

KATEGORIJA



Mediterranean
line

BOJE



Natur



Natur
Color

A11 nas uvjerava u kvalitet ne samo efikasnom obradom već i svojim prefinjenim izgledom. Sa utroškom od samo 10,5 komada po m², on nudi izuzetno ekonomičan odnos cijene i performansi u polaganju. Inovativna, ravna krovna keramika A11 se može koristiti za krov sa nagibom 13°, a zahvaljujući velikom kliznom letvanju idealna je za renoviranje krova.

Natur

Natur Color



prirodno
crvena*
RED00



crvena*
RED02



antik*
RED03



Tehničke karakteristike

Dimenzije	27,70x48,4	cm
Masa	4,20	kg/kom
Utrošak po m²	10,50	kom/m ²
Klizno letvanje	40,5-37,7	cm
Srednja pokrovna širina (cca)	23,5	cm
Pakovanje	240	kom/pal
Pokrivanje	ravno	

Minimalni nagibi (zavisno od sekundarnog krova)

Bez sekundarnog krova	22°	stepeni
Sa sekundarnim krovom¹	17°	stepeni
S povećanim zahtjevima na sekundarni krov²	13°	stepeni

Dostupne boje

Natur	prirodno crvena* RED00	
Natur Color	crvena* RED02, tamnosmeđa*, nero*, crna*, bazalt*	

¹ paropropusna folija Tondach

² lijepljenje preklopa i sastava paropropusne folije, postavljanje brtve ispod kontraletve

Pripadajuća oprema

Odzračnik

	Dimenzije	27,7x48,4	cm
	Masa	4,0	kg/kom
	Pakovanje	200	kom/pal

Rubni crijep, lijevi

	Dimenzije	27,7x48,4	cm
	Masa	4,50	kg/kom
	Pakovanje	48	kom/pal
	Utrošak po m ²	2,69	kom/m ²

Rubni crijep, desni

	Dimenzije	27,7x48,4	cm
	Masa	4,50	kg/kom
	Pakovanje	48	kom/pal
	Utrošak po m ²	2,69	kom/m ²

Priključak za sjeme

	Dimenzije	27,7x48,4	cm
	Masa	4,0	kg/kom
	Pakovanje	200	kom/pal
	Utrošak po m ²	4,59	kom/m ²

Rubni lijevi priključak za sjeme


	Dimenzije	27,7x48,4	cm
	Masa	4,50	kg/kom
	Pakovanje	48	kom/pal

Rubni desni priključak za sjeme

	Dimenzije	27,7x48,4	cm
	Masa	4,50	kg/kom
	Pakovanje	48	kom/pal

Streha

- Tondach A11
- Letvanje od 40,5-37,7 cm
- Kontra letva min 5 cm
- Visokopropusna krovna folija
- Tondach Fol-S/Fol-K/Fol Mono DT
- Daska
- Rog

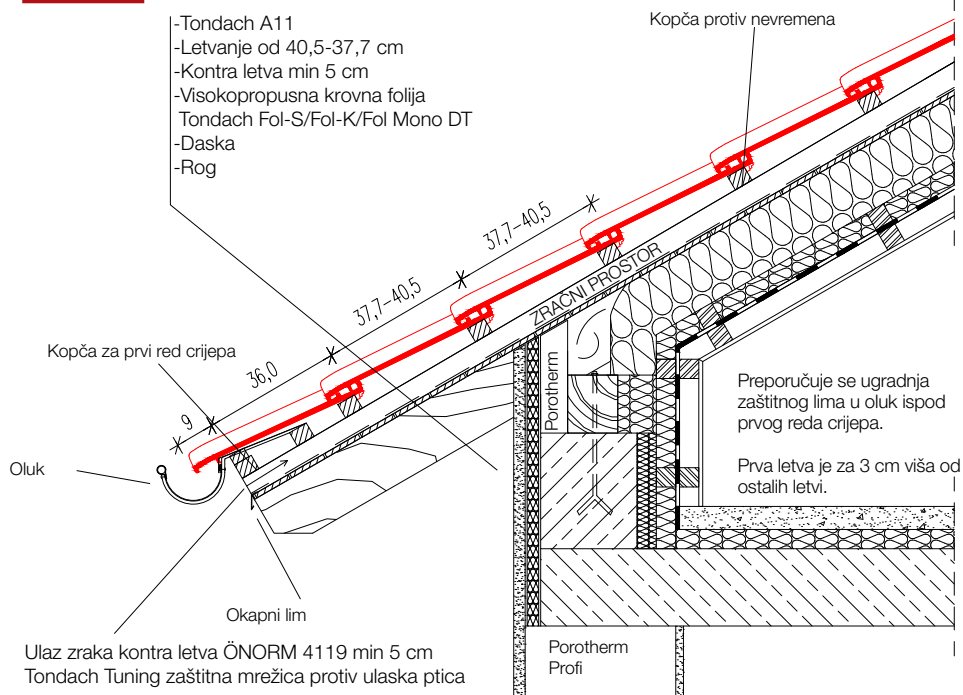


Lijevi i desni rub krova

Utoreni sljemenjak

Tondach Tuning odzračna traka za sljeme i greben.
Držać sljemeno-grebene letve
Sljemenjak je odvojen od crijeva oko 1,5 cm.

Izlaz zraka na odzračnom crijevu iznosi oko 30 cm²

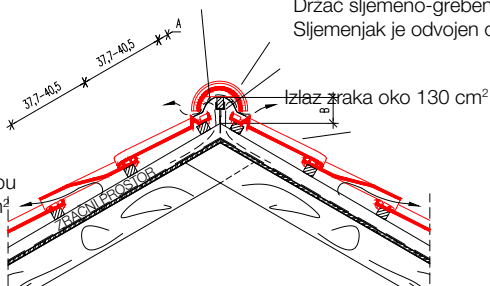

Sječeni crijev u grebenu obavezno vezati univerzalnim kopčama

LETVA 4x5 cm		
naklon	A (cm)	B (cm)
13°	5,0	15,8
15°	5,0	15,5
20°	5,0	14,6
25°	4,5	13,9
30°	4,0	13,3
35°	3,5	12,7
40°	3,0	12,7
45°	3,0	11,4
50°	2,5	10,9